




Flexible Couplings

Setscrew type: MC

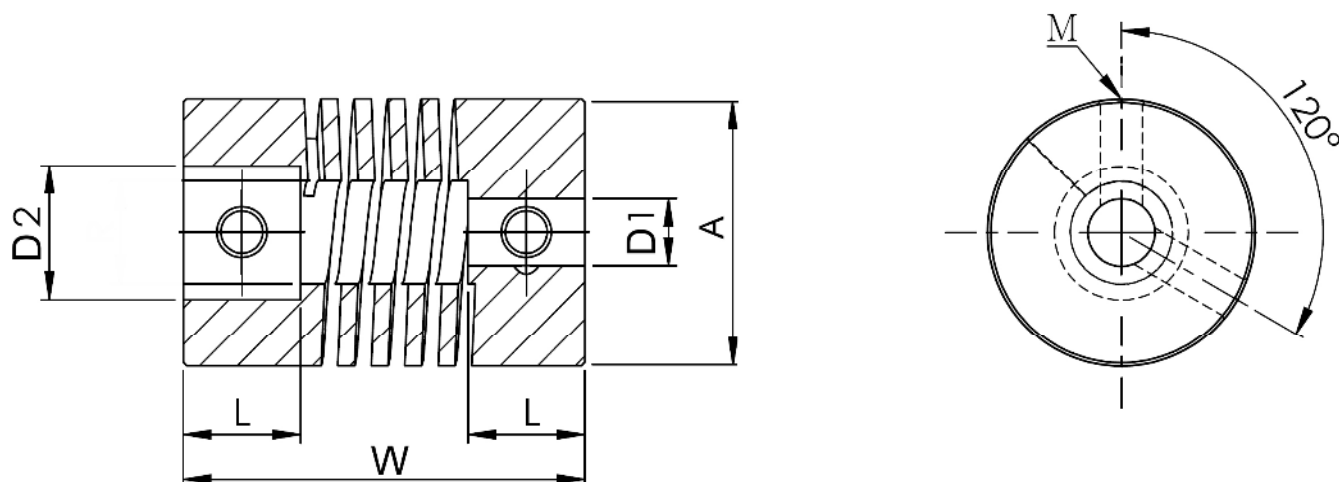

Dimension / 尺寸

unit:mm

Product No 產品編號	A	L	W	Stock Bores 標準孔徑 D1×D2(公差H8)		M
				Min D1	Max D2	
MC-16	16	6.5	23	4	8	M3
MC-20	20	7.5	26	5	10	M4
MC-25	25	8.5	31	6	13	M4

Specification / 規格

Product No.	Rated Torque	Max. Torque	Max. Rotational Frequency	Moment * of Inertia	Error of Eccentricity	Error of Angularity	Error of Shaft End play	Mass **
產品編號	常用扭矩	最大扭矩	最高迴轉數	慣性	容許偏心值	容許偏角值	容許軸向位差值	重量
	(N.m)	(N.m)	(min ⁻¹)	(kg.m ²)	(mm)	(°)	(mm)	(g)
MC16-	0.3	0.6	24000	3.4×10 ⁻⁷	0.10	2°	±0.4	8.2
MC20-	0.5	1.0	19000	8.6×10 ⁻⁷	0.10	2°	±0.4	15
MC25-	1.1	2.2	15000	2.2×10 ⁻⁶	0.15	2°	±0.5	28